

Air Operated Double Diaphragm Pumps



— D030 Plastic

¼" Plastic Diaphragm Pump Data Sheet

- Max Flow Rate:** 8 L/min.
- Liquid Connections:** ¼" Female Side-ports.
- Max Slurry Size:** 0mm.
- Max Suction Lift:** Dry: 3.5m. Wet (Primed): 8.0m.
- Max Discharge Pressure:** 0.7 MPa
- Check Valve Configuration:** Flat Valves, PTFE.
- Pump Wetted Material Options:** CFPVDF.
- Diaphragm Options:** PTFE.
- Air Motor Material:** PPS Plastic.

Description: Special Low Flow ¼" Plastic AODD Pumps available in CFPVDF. Looped C® Spring Air Spool. PPS Plastic (Ryton) Air Motor. Female threaded Side Port Connections. PTFE Diaphragms & Flat Check Valves. Reinforced PP Base. Internal Exhaust Silencer.

Pump Features: ¼" PVDF Plastic AODD Pumps fitted with the Looped C® Air Spool, Ekonol® Seal Rings & Fully Independent Pilot Valves for increased performance, reliability & extended life cycle. Special low flow model where typically an Export Licence is not required. Drop-in dimensions & footprint. Fully bolted body, heavy-duty construction and sturdy plastic base. Manufactured from high grade reinforced engineering plastics for mechanical strength, rigidity, abrasion resistance & chemical stability. 100% oil or grease lubrication free, offering clean, emissions free, environmentally friendly operation. Easily maintainable with modular replaceable wear parts, outside accessible Air Spool & manual Spool Reset Switch. Fully torqued, leak and operation tested prior to shipment. Designed and manufactured in Japan.



D030VT
¼" PVDF Pump
8 L/min.




030 Plastic Pump Specifications	
Pump Model / Material	VT
Max Flow Rate	8 L/min [2.1 GPM]
Max Solids Size	0 mm
Max Discharge Pressure	0.7 MPa [100 psi]
Supply Air Pressure Range	0.2 – 0.7 MPa [30 - 100 psi]
Max Suction Lift	Dry: 3.5 meters. Wet (Primed): 8.0 meters.
Max Air Consumption	250 L/min (ANR) [8.83 SCFM]
Max Discharge Volume Per Cycle	15 mL
Ambient Temperature Range	0 – 70°C [32 – 158°F]
Liquid Temperature Range	0 – 60°C [32 – 140°F]
Connections: Suction & Discharge	¼" Female Threaded Side Ports

Note: Factors affecting a pumps stated liquid flow rate, suction lift & solids handling capabilities include but are not limited to; pump size, diaphragm, ball valve & ball seat, type & materials of construction, air inlet pressure & air flow capability, liquid viscosity, specific gravity, slurry content, ambient & liquid temperature, liquid inlet & liquid outlet width, piping type, piping length & overall piping configuration. A minimum supply air pressure of 30 PSI (0.2 MPa) is required to operate the pump. If the supply pressure is less than 30PSI (0.2 MPa), the pump may not operate properly. Flat type check valve pumps are not recommended for use with slurry laden liquids. Oil & Grease Lubrication is not required under normal operating conditions. All 030 Series Plastic Diaphragm Pumps are shipped complete with reinforced PP plastic Base, Rubber Feet, Air Inlet Shutoff Valve & Internal Exhaust Silencer as Standard Accessories.

Nomenclature



- D Series Diaphragm Pumps
- Connection Size / Model
- Body Material (Wetted)
- Diaphragm Materials
- Other Options

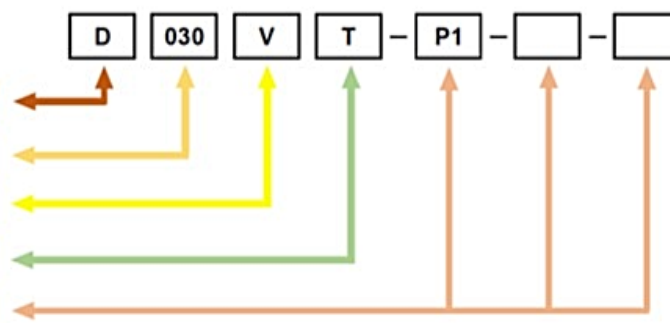


030V: ¼" CFPVDF Pump. (Looped C® Air Spool Model).
T: PTFE Diaphragms, Check Valves & Liquid Seals.
P1: Optional Electric Proximity Sensors (Spool Sensing Type) (10-30 V Dc)




Optional Electric Stroke Counter. Electric Proximity Sensor, Cable and PP or SUS Cap. Will fit directly on any standard pump.

Pump Performance Curves

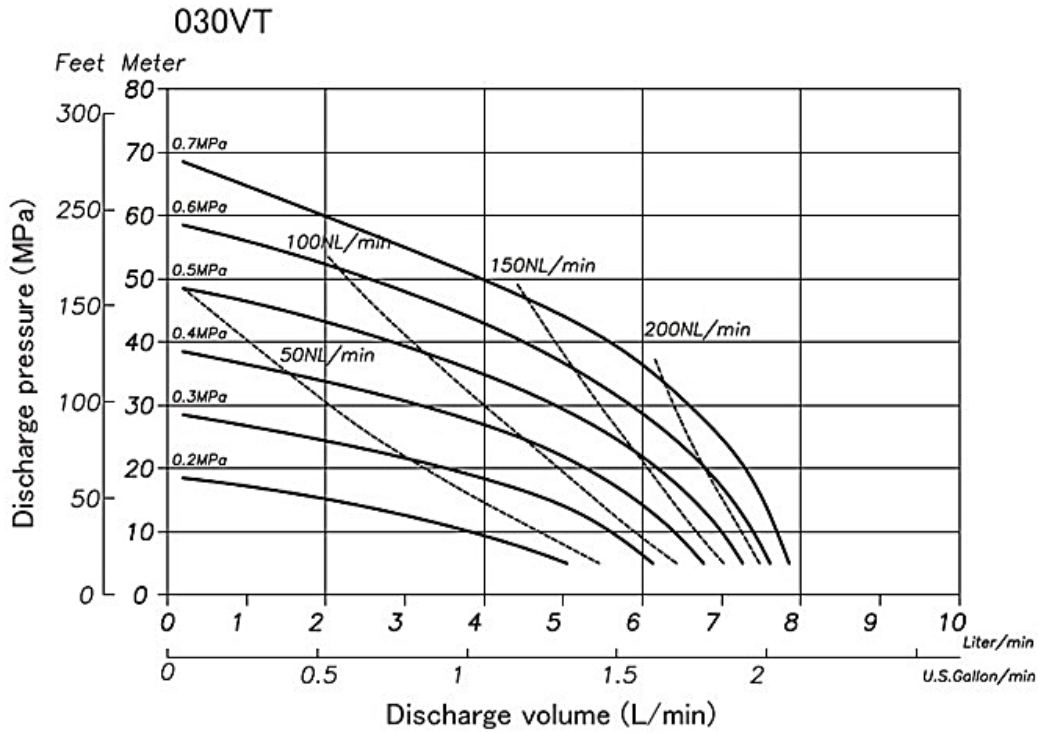

Wetted Materials Of Construction

MODEL	030VT
Pump Wetted Parts	PVDF
Diaphragm	PTFE
Valve Stopper	PVDF
Flat Valve	PTFE
Valve Seat	PVDF
Center Disk	PVDF
Weight	1.7 kg [3.7 lbs]

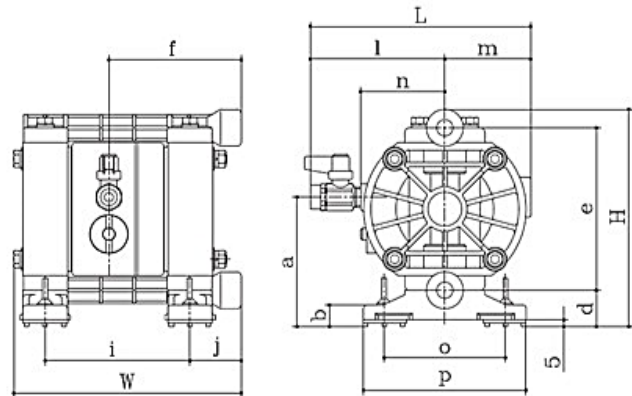

Dimensional Drawings

MODEL	H	W	L	a	b	d	e	f	i	j	l	m	n	o	p	AIR INLET	AIR EXHAUST	LIQUID IN/OUT
030VT	147 [5.79]	154 [6.06]	149 [5.87]	88 [3.46]	15 [0.59]	25 [0.98]	110 [4.33]	89 [3.50]	98 [3.86]	35 [1.38]	91 [3.58]	58 [2.28]	57 [2.24]	82 [3.23]	110 [4.33]	Rc1/4	Rc3/8	Rc1/4

Looped C® Air Spool

