



Conductive PTFE (Teflon®)

Plastic Pump Lineup

yts-pump.com

Features


Electrically Conductive PTFE Pumps for the safe transfer of highly corrosive & flammable chemicals or for use in explosive environments.

- 3 Models with 1/4" 1/2" & 1" Liquid Connections.
- Conductive PTFE Wetted Section.
- Conductive PPS / PP Air Motor Section.
- Electrically Groundable with ATEX Certification.
- Safely Transfer Flammable Chemicals.
- Operate in Explosive Environments.
- Very High Chemical Resistance.
- 100% Outside Accessible Air Motor.
- Fully Bolted Construction & Machined Mating Surfaces.
- Fully Torqued & Tested Prior to Shipment.
- Designed & Manufactured in Japan.
- Patents Pending.


For more information: sales@yts-pump.com



DFC050TT
1/4" Conductive PTFE Pump
11 L/min Max Flow Rate

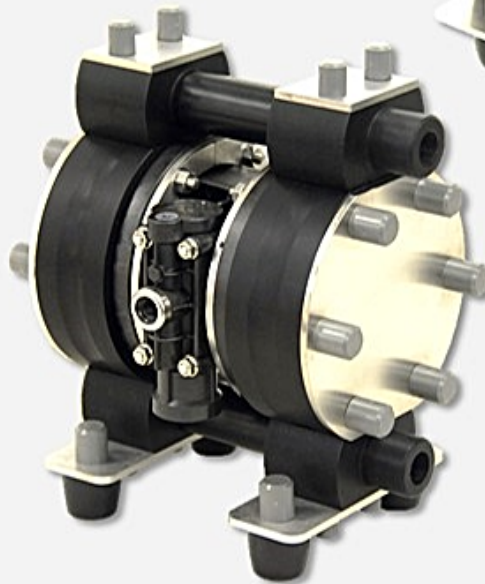

DFC152TT-PC
1/2" Conductive PTFE Pump
50 L/min Max Flow Rate

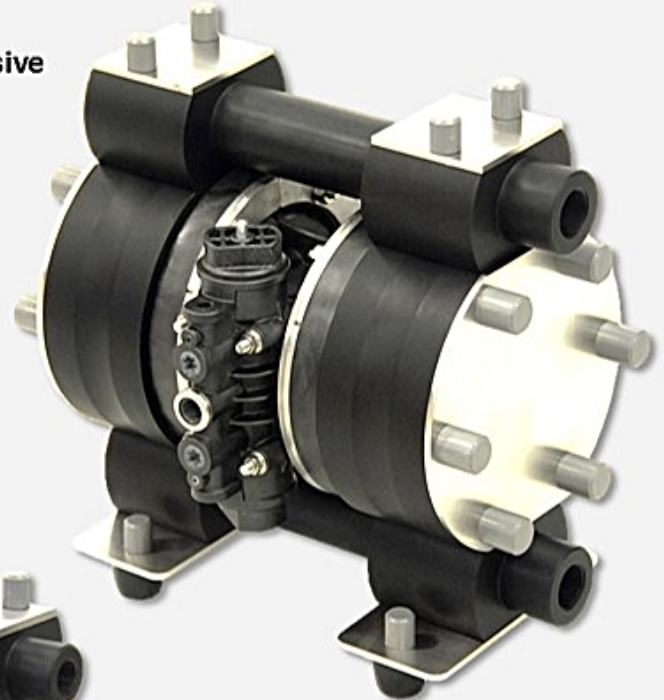

DFC252TT-PC
1" Conductive PTFE Pump
150 L/min Max Flow Rate



Looped C° Spool Assembly
New Generation Mechanically Assisted Non-Centering Spool

YTS®

- ❑ Air Powered Double Diaphragm Pumps Manufactured in Japan with Superior Quality & Finish.
- ❑ Designed for High Performance Operation & Long Life Expectancy.
- ❑ Engineered with Design Features Not Often Found in Other Brand Pumps.

AODD Pump Capabilities.

Self Priming.	Variable Discharge Pressures.	Inherently Safe Design.
Run Dry.	Transfer Liquid Slurries.	Portable & Easy to Use.
Run up to Dead Head.	Transfer Large Sized Solids.	Transfer Viscous Fluids.
Variable Flow Rates.	Handle Abrasives.	Frequent Start Stop Operation.
Shear Sensitivity.	Transfer Chemicals.	Powered by Compressed Air.

For more information about YTS Pumps please contact: sales@yts-pump.com

©YTS Co Ltd Japan. All Rights Reserved 2017



JQA-QMA14279



091